
## RESELS ARESSES

UPGRADABLE PNEUMATIC CYLINDER WITH MULTI-STAGES GIVES INCREDIBLE FORCE

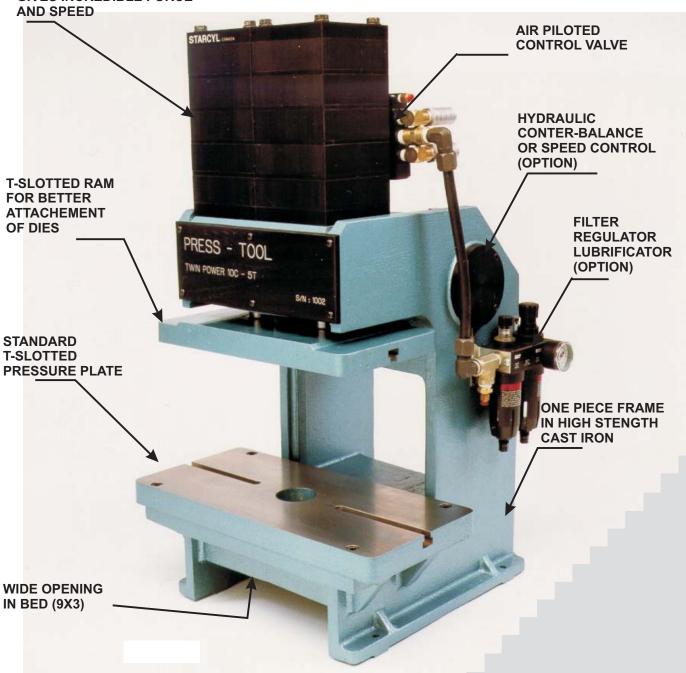

ENTIRELY AIR OPERATED!
NO ELECTRICS, NO MECHANICS
NO HYDRAULICS.

TP SERIES
4 TO 8 TONS

## TP SERIES TECHNICAL SPECIFICATIONS ...

ENTIRELY AIR OPERATED, NO ELECTRICS, NO MECHANICS.

AIR IS VERY FAST (200 STR./MIN), DEPENDABLE, SILENT AND EASY TO

SERVICE.

PNEUMATIC CYLINDERS GIVE FORCE IN ALL ITS STROKE.

THE RAM IS GUIDED WITH CLOSE TOLERANCE BETWEEN TWO SHAFTING RODS AND BRONZE BUSHINGS (no need of lubrification).


AIR VALVE PILOTED TO REDUCE AIR CONSUMPTION.

IDEAL FOR JOBS SUCH AS: DIE CUTTING, MARKING, BLANKING, PUNCHING, RIVETING AND ASSEMBLY (bearing, bushing).

PRESS-TOOL	"C" PRESS	TWIN POWER
	MODEL TP-XX-XX	
UNITS	<u>METRIC</u>	<u>IMPERIAL</u>
CAPACITY	3000 to 8000 daN	3 TO 8 TONS
(Other strokes also available) STROKE	25 mm	1"
(height x length x deep) OVERALL DIMENSION	787 x 432 x 406 mm	31" x 17" x 16"
WIDE BED AREA (standard)	381 x 203 mm	15" x 8"
OPENING IN BED	229 x 76 mm	9" x 3"
SHUT HEIGHT ( stroke down)	191 mm	7"
RAM AREA	330 x 178 mm	13" x 7"
PRESSURE PLATE AREA	432 x 203 mm	17" x 8"
PRESSURE PLATE CENTER HOLE	dia. 50 mm	dia. 2"
T-SLOT (size thread)	12mm, M10	½, 3/8" nc
SHIPPING WEIGHT	160 Kg	350 lbs
WARRANTY	2 YEARS	

Forces are given in lbs at 90 psi for Inperial and in daN at 6.9 bar for Metric.

SPECIFICATIONS HEREIN ARE SUBJECT TO CHANGE WITHOUT NOTICE.



**ALSO** CUSTOM 5 TONS COLUMN PRESS

## STARCYL INC.

1-877-STARCYL

TEL: (450) 661-1212 FAX: (450) 661-0094